

Bi-fold doors




Operating instructions

Standard handles

To lock

- ▶ Insert key into cylinder
- ▶ Push handle upwards (see diagram)
- ▶ Rotate key in cylinder
- ▶ The door will now be locked to unlock
- ▶ Insert key into cylinder and rotate
- ▶ Press handle down, the door will now be open

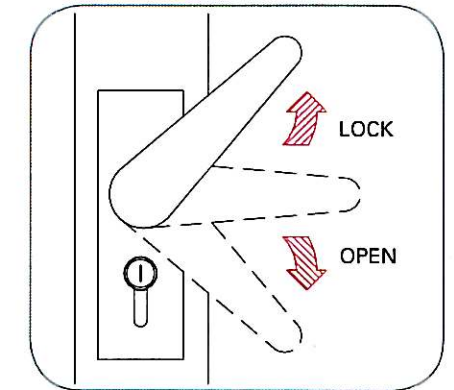

D-handle (aspect only)

To open

- ▶ Lift the D-handle to reveal the hidden lever
- ▶ Lift the lever upwards to release shoot bolts
- ▶ Use the D-handle to push / pull the doors into position
- ▶ Return D-handle to flush position

To close

- ▶ Lift D-handle and use it to push / pull doors into closed position
- ▶ Lift D-handle and move the lever downwards to engage shoot bolts
- ▶ Return D-handle to flush position



Maintenance

To attain optimum performance of your bi-fold doors, the hinges will require periodical maintenance and lubrication. The hinges and tracks should be kept free from dirt, debris and obstruction at all times.

▶ Cleaning frames

To remove atmospheric grime, clean regularly with soap and water. Check drain holes are free from obstruction. If blocked, remove obstruction and wash thoroughly to ensure correct drainage.

▶ Lock lubrication

Clean and lightly grease external moving parts and frame keeps annually.

▶ Hinge lubrication

Clean and lightly oil hinge pins annually. If open out, lubricate every six months.

▶ Standard handles

Clean and lightly oil external-moving parts annually.

▶ Aluminium roller track

Free any debris or dirt from drainage or track.

▶ D-handle (aspect only)

Clean and lightly oil external-moving parts annually.

▶ Cylinder

Do not attempt to lubricate locking cylinder.