


COMPANY:		REF:
INVOICE TO:		PCODE
ROOF DELIVERY?	<input type="checkbox"/> TO:	PCODE
GLASS DELIVERY?	<input type="checkbox"/> TO:	PCODE
EMAIL:	TEL:	

ROOF REQ'D DATE	
ROOF GLASS REQ'D DATE	

THE PLAN VIEW MUST SHOW THE ROOF WITH ANY WALL, RIDGES, HIPs, DOWNPIPES, BOX GUTTERS AND VALLEYS. ALL SIZES MUST RELATE TO THE INSIDE CILL SIZE AND SHOW ANY CRITICAL RAFTER SPACINGS

FRAME DEPTH MM SWC USE 70MM	HEIGHT RESTRICTION MM HEIGHT FROM FINISHED FLOOR TO UNDERSIDE OF RESTRICTION	
ROOF PITCH DEGREES	Finished Floor	


COLOUR	WHITE <input type="checkbox"/>	7016 ANTH GREY <input type="checkbox"/>
	CHERRY <input type="checkbox"/>	ROSE <input type="checkbox"/>
	CHERRY/WHITE <input type="checkbox"/>	ROSE/WHITE <input type="checkbox"/>
	KOLORBOND RAL <input type="text"/>	

GLAZING	IF GLASS CHOSEN, BLACK SPACER BAR IS PROVIDED	ANY ROOFS WITH GLASS >3210mm WILL HAVE 1.2 U-VALUE GLAZING
	AMBI BLUE 1.0 <input type="checkbox"/>	AMBI NEUTRAL 1.0 <input type="checkbox"/>
	AMBI SUNSHADE BLUE 1.0 <input type="checkbox"/>	AMBI CLEAR 1.0 <input type="checkbox"/>
	AMBI AQUA 1.0 <input type="checkbox"/>	AMBI BRONZE 1.0 <input type="checkbox"/>
	AMBI ULTRA 1.0 <input type="checkbox"/>	AMBI SATIN PRIVACY 1.0 <input type="checkbox"/>
	OPAL POLY 25MM <input type="checkbox"/>	OPAL POLY 32MM <input type="checkbox"/>
	BRONZE POLY 25MM <input type="checkbox"/>	BRONZE POLY 32MM <input type="checkbox"/>
	BRONZE/OPAL POLY 25MM <input type="checkbox"/>	BRONZE/OPAL POLY 32MM <input type="checkbox"/>
	CLEAR POLY 25MM <input type="checkbox"/>	CLEAR POLY 32MM <input type="checkbox"/>
	HEATGUARD POLY 25MM <input type="checkbox"/>	HEATGUARD POLY 32MM <input type="checkbox"/>
	UNGLAZED FOR 24/25MM <input type="checkbox"/>	UNGLAZED FOR 32MM <input type="checkbox"/>

CRESTING/FINIAL
REGENCY (ALI) <input type="checkbox"/>
CRESTLESS <input type="checkbox"/>

POLYMER SEALANTS FOR ACTIVE GLASS ROOFS
WHITE <input type="checkbox"/>
BLACK <input type="checkbox"/>
NUMBER OF TUBES <input type="text"/>

ROOF VENT(S) – DRAW POSITION ON ROOF PLAN
MANUAL + BRASS POLE <input type="checkbox"/>
MANUAL + CHROME POLE <input type="checkbox"/>
ELECTRIC WITH SWITCH <input type="checkbox"/>
CLIMATE (MAX 4 VENTS) <input type="checkbox"/>

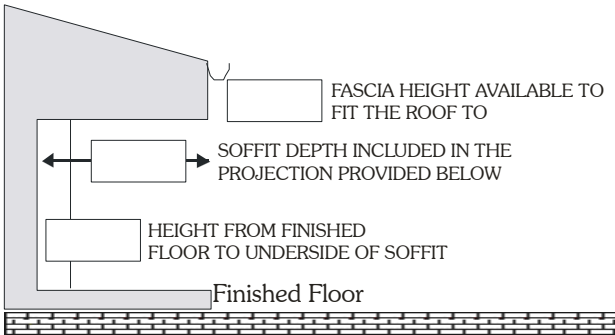


## BOX GUTTER



297W 125H

BOX GUTTER SIZES BASED ON SWC FRAMES.

The box gutter must be supported at 2.25 metre intervals along its length. These supports can be either Gallows Brackets, Brick Pier or Structural Mullion. In all cases, please ensure the brickwork of sound quality.

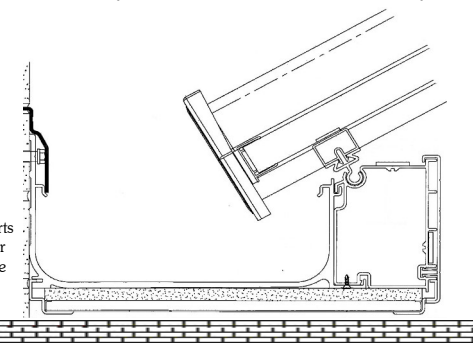

PROJECTION

MM

WHEN GABLE CONSERVATORIES ARE ORDERED, SWC RECOMMEND THE EAVES BEAM SHOULD BE RUN ROUND THE FRONT. THIS IS AT OUR DISCRETION UNLESS STATED

WIDTH

MM

MARK YOUR DOWNPIPE WITH A CIRCLE

EXAMPLES . PLEASE DRAW YOUR CONSERVATORY USING THESE EXAMPLES AS A GUIDE FOR YOUR ROOF SHAPE

LEAN-TO EXAMPLES



VICTORIAN/EDWARDIAN EXAMPLES



ROTATED EXAMPLES



P-SHAPE EXAMPLES



SIGNATURE